


HSF


NOTES:

Current Rating: 0.5A
 Voltage Rating: 50V AC/DC
 Contact Resistance: 50milliohm Max
 Insulation Resistance: 100Megohm Min
 Operation Temperature: -20°C to +105°C

Housing Material: PA9T+30%G.F(UL94V-0)
 Contact Material: Phosphor Bronze
 Contact plating: Au or Sn over Ni

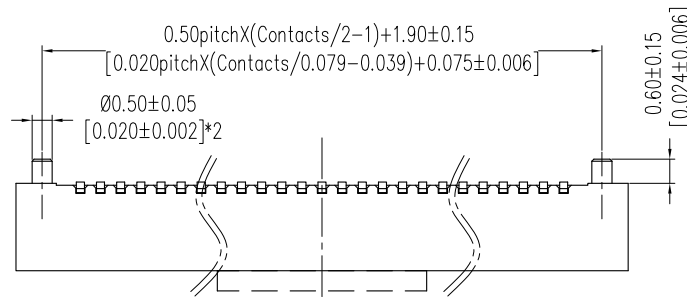


Recommended P. C. B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

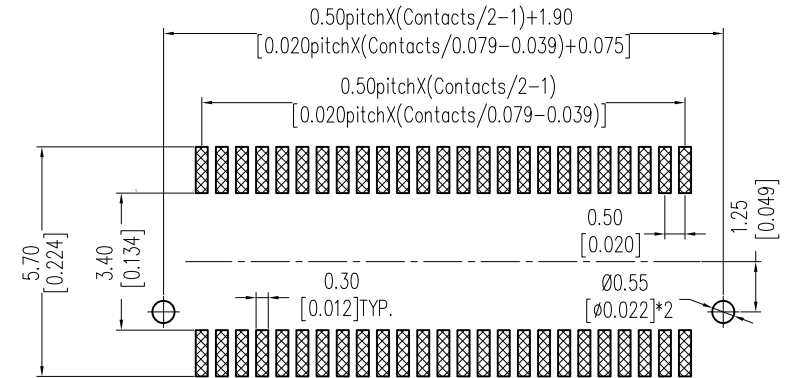



Ordering Information

3620-S XXX - XXX XX R 01

No. of Pins Housing High Contact Plating T=Tube
 P=Tube+CAP R=Tape&Reel+CAP
 G1=3u"Gold G2=5u"Gold

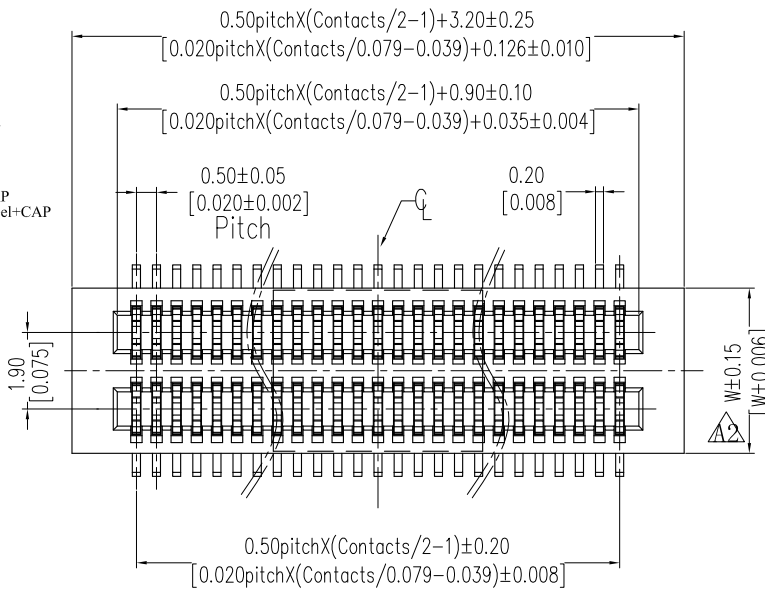

ASS'Y HIGH(H)	PLUG(H1)	SOCKET(H2)	SOCKET(W)
3.00	0.80	2.20	4.40
4.00	1.00	3.00	4.10
4.50	1.50	3.00	
5.00	2.00	3.00	
5.50	1.50	4.00	
6.00	2.00	4.00	
6.50	2.00	4.50	

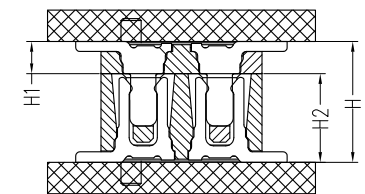

Assembly

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A3	2016/10/26	取消H=2.7高度规格, 单独发行图面	△3	OPERATION	DingWenMin	2016/10/26	SCALE	FIT	3620-SXXX-XXXXXR01
A2	2015/02/09	Modify	△2	X.X ±0.40	CHECK	DATE	UNIT	mm	TITLE: 0.50mm B TO B FEMALE 180° SMT TYPE
A1	2012/10/12	Modify	△1	X.XX ±0.25	APPROVE	DATE	SIZE	A4	
A0	2012/06/27	NEW	—	X.XXX ±0.15	DATE	SHEET	1/1	Customer NO.	
				Angle ± 3°			PROJ.		
				DIM TOL					