
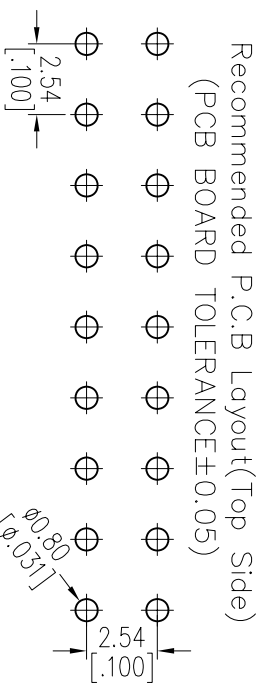


HSF

TECHNICAL SPECS:

Current Rating: 3.0AMP
 Contact Resistance: 10m Ω Max
 Dielectric Strength: Min 1000VRMS
 Mechanical Life: Min 500 cycles
 Operation Temperature: -40°C to +105°C


Sleeve: Brass CuZn36Pb3(C36000)
 Contact plating: Au over Ni
 Connecting Pin: $\phi 0.47\text{mm}$
 Insulator Material: PPS+30%G.F(UL94V-0)

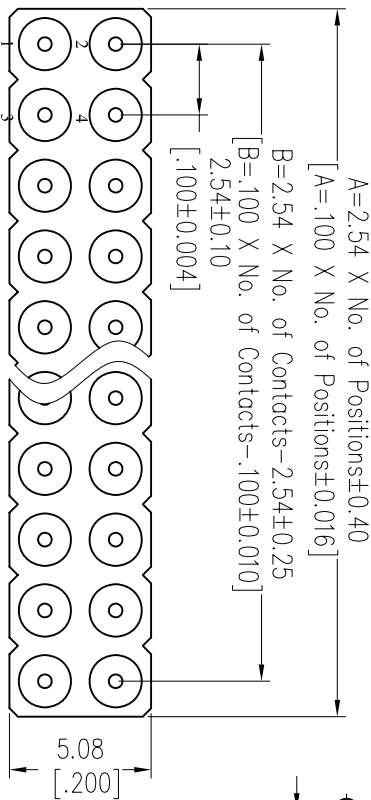

Ordering Information

3510-192 XX S XX 076 X 1

No. of Pin: 2-50PIN
 Contact Plating: G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold
 Packing: A=Tray, T=Tube

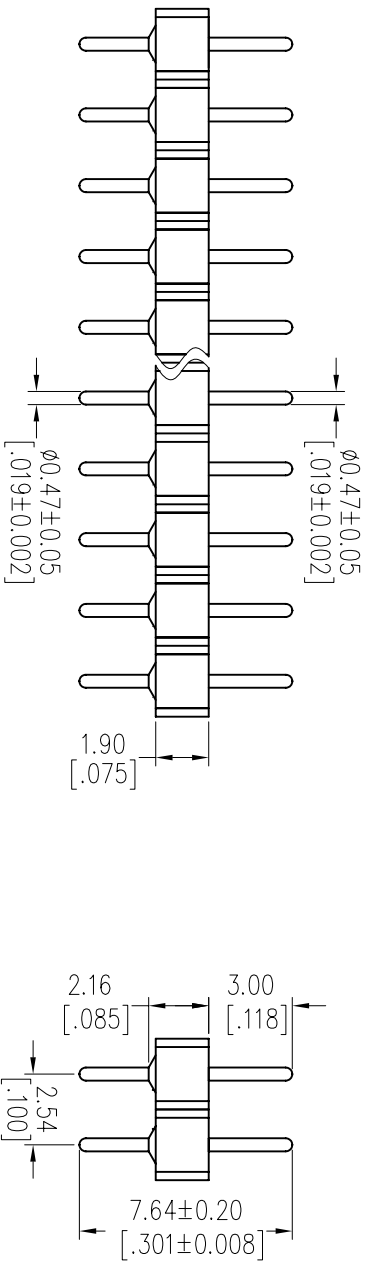

Item	Pitch	Mating
Standard	2.54	3520
Alternate		

OPERATION		DRAW		DATE		SCALE		FIT		PART NO.	
XX	±0.40	JYHuang		2012/10/22		mm				3510-192XXSX076X1	
XX	±0.25	CHECK		DATE		A4				TITLE:	
X.XXX	±0.15			DATE		1/1				2.54mm MACHINED PIN HEADER	
Angle	± 3'	APPROVE		DATE		PROJ.				DUAL ROW 180° H=1.90 L=7.64	
CHANG	DIM	TOL								Customer NO.	
REV	DATE	MODIFICATION DESCRIPTION									
A0	2012/10/22	NEW									