

HSF

NOTES:





Rated Current:18.0 AMP
 Contact Resistance:8 mΩ Max
 Withstand Voltage:2000 V AC/DC
 Insulation Resistance:1000 MΩ min
 Operation Temperature:-40°C to +105°C
 Wire Range:30~12 AWG
 Wire Strip Length: 7 mm
 No.of Positions:2~20
 Screw Counter Torsion Force: 4.4 lbf.in Min.

Terminal Material:Phosphor Bronze
 Terminal Plating:Matte Tin Plated Over Nickel
 Pin Block Material:Brass
 Pin Block Plating:Nickel Plated Over All
 Screw Material: Steel
 Screw Plating:Nickel Plated Over All
 Up Cover Material:PA66 UL94 V-0
 Below Cover Material:PA66 UL94 V-0



Ordering Information:

P F 750 - B XX A SM W 1

F=Female Pitch 750=7.50
 No. of Pins 02-20P
 Color A=Green
 Contact Plated SM=Matte Tin
 Type W=With Screw

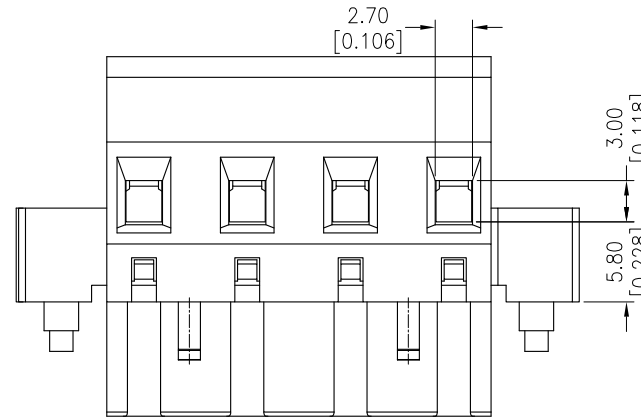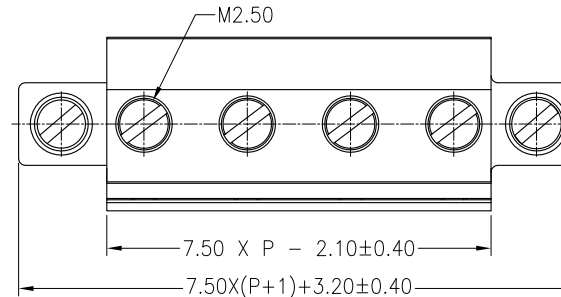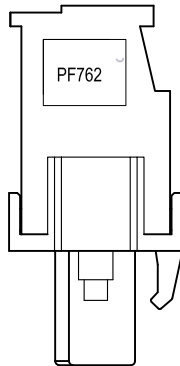

3D VIEW(REF.)
SCALE 1:2

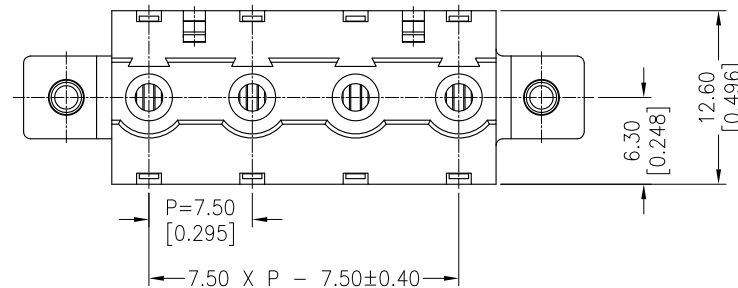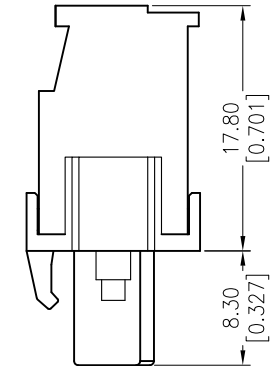

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	DATE	SCALE	FIT	PART NO.
				X.X	±0.40					
				X.XX	±0.25	CHECK	DATE	SIZE	A4	TITLE:
A0	2013/11/08	NEW		X.XXX	±0.15	APPROVE	DATE	SHEET	1/1	7.50mm Pitch Female Pluggable Terminal Blocks
				Angle	± 3'			PROJ.	Customer NO.	